

Pressurized Storage Tanks & Booster Pump



PR-A7



PR-A6



PR-A5



PR-A4



PR-A3P



PR-A3



Ball Valve & Connector for A6, A7

Type no.	Material	Capacity	Dimension(mm)	Color Available	Pipe Thread	Endurance Temperature
PR-A2	Steel	1.2Gal.	H319 x D203	White	1/4" Male NPT	60°C
PR-A3	Steel	2.2Gal.	H358 x D230	White	1/4" Male NPT	60°C
PR-A3P	Outside: Plastic Inside: Steel	2.2Gal.	H364 x D240	White	1/4" Male NPT	45°C
PR-A4	Steel	3.6Gal.	H380 x D276	White	1/4" Male NPT	60°C
PR-A4P	Outside: Plastic Inside: Steel	3.6Gal.	H401 x D280	White	1/4" Male NPT	45°C
PR-A5	Plastic	3.5Gal.	H400 x D285	White	1/4" Male NPT	45°C
PR-A55	Steel	5.5Gal.	H410 x D300	White	1/4" Male NPT	60°C
PR-A6	Steel	10.7Gal.	H580 x D390	Ivy	3/4" Male NPT	60°C
PR-A7	Steel	20Gal.	H800 x D390	Ivy	3/4" Male NPT	60°C


PUMP & TRANSFORMER



PR-TR24

Diagram of Pressure and flow rate

PR-PMAP6689

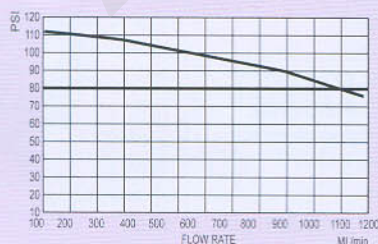

PR-PMAP6689

