


TECHNICAL DATA

Filter type		NW 500	NW 650	NW 800	NW 500 TE
Diameter of pipe :		2"	2 1/2"	3"	2"
Average flow rate :	m ³ /h gpm	18 79	25 110	32 141	2* 9*
Working pressure :	bar psi	10 145	10 145	10 145	10 145
Max. operating pressure :	bar psi	16 232	16 232	16 232	16 232
Max. operating t° :		50° C 122° F	50° C 122° F	50° C 122° F	50° C 122° F
Weight :	kg pounds	6.4 14.11	7 15.43	7.4 16.31	5.6 12.35
Standard filter sleeve :		25 µ	25 µ	25 µ	—
Available volume :	ltr US Gal	—	—	—	4.85 1.28
Filtration surface :	cm ² Sq inches	1 288 199.64	1 288 199.64	1 288 199.64	—

* Value with activated carbon CINTROPUR SCN

■ > mm
■ > inches

INSTRUCTIONS

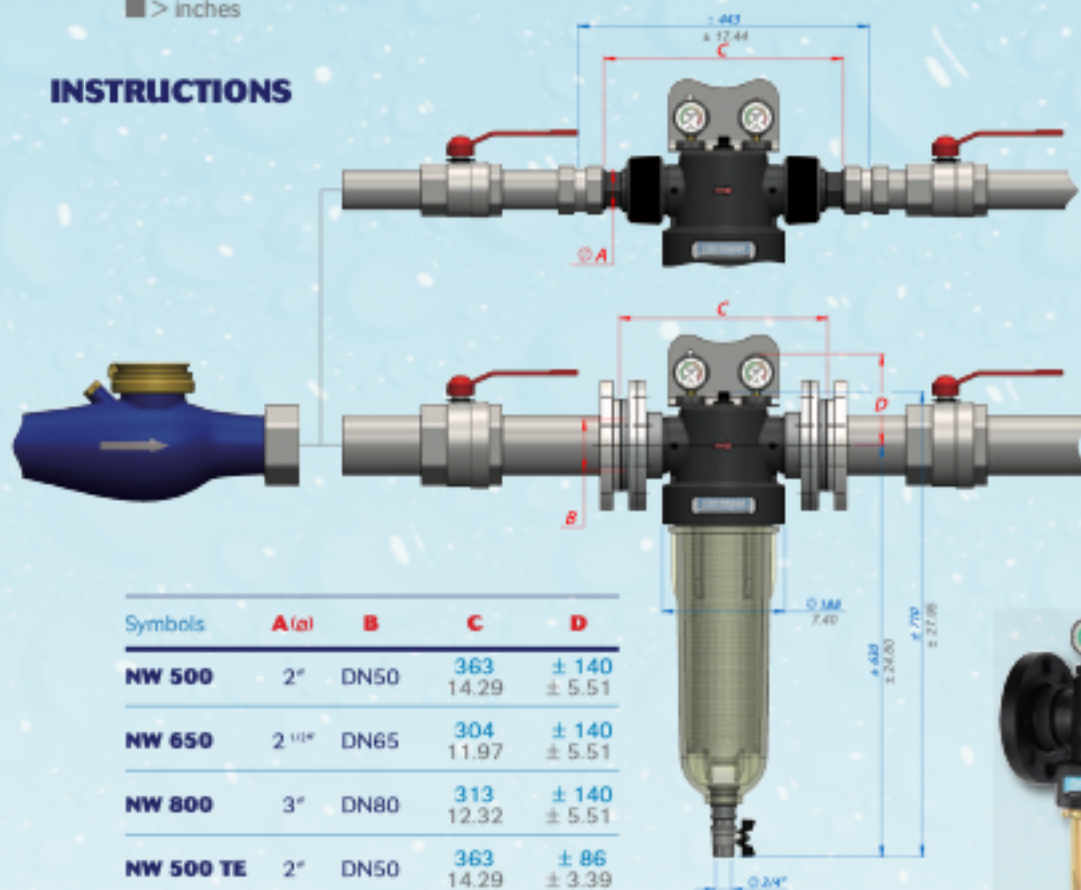

Symbols	A (a)	B	C	D
NW 500	2"	DN50	363 14.29	± 140 ± 5.51
NW 650	2 1/2"	DN65	304 11.97	± 140 ± 5.51
NW 800	3"	DN80	313 12.32	± 140 ± 5.51
NW 500 TE	2"	DN50	363 14.29	± 86 ± 3.39

Your supplier

